

Compact InfraRed Camera (120x120 IR Resolution)

Easy-to-Use Troubleshooting Tool - Weighs only 340g

- Compact sized, Lightweight - 340g
- Thermal Sensitivity of <math><0.1^{\circ}\text{C}</math> @ 25°C
- Easy-to-Use Focus Free Lens
- Stores up to 5000 JPEG Images
- 2.8" LCD Color Display
- Long Battery Life Lasts >4 Hours
- Convenient Thumbnail Image Gallery



Large 2.8" Display

Detect hidden problems fast

Includes PC software



FLIR i7 Features

- **High accuracy** — 2% and thermal sensitivity of 0.1°C helps you find problems faster and easier — critical for condition monitoring of thermally sensitive targets
- **Extremely lightweight** — Resulting in less user fatigue 340g
- **Easy-to-use** — Pocket sized and fully automatic design makes it incredibly easy-to-use even for first time users — perfect for general purpose use
- **Focus free lens** — For convenient viewing
- **High Resolution LCD** — 71mm color LCD
- **Double Molded Design** — Rugged design with easy grip handle construction meets IP43 dust/splashproof standards
- **Measurement Modes** — Spot (center), Area (Min/Max), and Isotherm (above/below) display measurement modes
- **Long Battery Life** — >4 hours continuous operation on a single charge for uninterrupted inspections
- **Large Memory Storage** — MicroSD card stores up to 5000 Radiometric JPEG format images. Each image can be analyzed using the included QuickReport™ PC Software
- **Includes** — 512MB microSD Card, miniSD™ adaptor, Li-Ion rechargeable battery with 90-260V AC adaptor /charger with EU, UK, US and Australian plugs, QuickReport™ software with USB Mini-B cable, built-in manual lens shutter, hand strap, and hard case




The Difference is Training

Get the most out of your FLIR IR camera investment with world-class instruction through the Infrared Training Center (ITC), the largest infrared applications training organization in the world. The ITC's Level 1 Infrared Thermography Training Course is geared to the new infrared camera user and focuses on its use for a variety of condition monitoring/predictive maintenance applications. Level 2 and Level 3 certificate courses for more advanced infrared training are also available. Courses are taught by certified instructors with extensive experience in a wide variety of infrared thermography and thermal imaging applications. ITC certifications are recognized by major professional organizations.



ITC's Official website:
www.infraredtraining.com

E-LearnIR portal:
<http://irtraining.inquisiq.com>

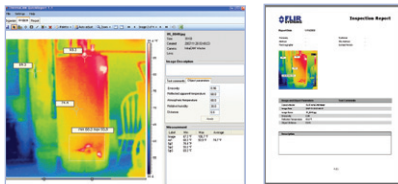

QuickReport™ PC software enables user to analyze Temperature of all thermal pixels of any FLIR Camera JPEG images

- **Preventive Maintenance** — Thermal imaging is a valuable tool in preventive maintenance of electrical, mechanical and structural systems, able to help detect problems, prevent unscheduled downtime, guide needed corrective action and increase plant safety.
- **Utility Market** — In the utility industry, failure is not an option. That's why infrared thermal imaging has become a key tool for predictive maintenance programs for utility firms everywhere.
- **Energy Audits** — Energy costs are increasing at a substantially alarming rate. Missing or low quality insulation, inadequate Heating, Ventilation, and Air Conditioning (HVAC) systems, poor air flow — all are typical problems that cause homes to waste energy.



FLIR i7 Specifications

Features

Temperature range	-20°C to 250°C
Image Storage	5000 Images (microSD card memory)
Emissivity	Emissivity Table; 0.1 to 1.0 adjustable

Imaging Performance / Image Presentation

Field of view/min focus distance	25° X 25°/0.6m
Focus	Focus free
Thermal sensitivity (N.E.T.D)	<0.1°C at 25°C
Detector Type	Focal plane array (FPA) uncooled microbolometer; 120 X 120 pixels
Spectral range	7.5 to 13µm
Display	2.8" color LCD
Image Controls	Palettes (Iron, Rainbow, and Black/White)
Set-up controls	Date/time, °C/°F, 21 languages
Measurement modes	Spot (with correction for emissivity and reflected temperature), Area (Max/Min), Isotherm (above/below selected temperature interval)
Battery Type	Li-Ion
Battery operating time	>4 hours, Display shows battery status
Charging system	In camera, AC adapter; 3 hours to 90% capacity
AC operation	AC adaptor 90-260VAC, 50/60Hz
Adaptor Voltage	5 VDC output to camera
Operating temperature range	0°C to 50°C
Storage temperature range	-40°C to 70°C
Humidity	Operating and storage 20% to 80%, non-condensing, IEC 359
Shock	25G, IEC 68-2-29
Vibration	2G, IEC 68-2-6
Dimensions/Weight	223x79x83mm/<340g, including battery
Encapsulation	Camera housing and lens: IP 43 (IEC 60529)

Asia Pacific Headquarter
 Hong Kong
 FLIR Systems Co Ltd.
 Room 1613 – 16, Tower 2 Grand Central Plaza
 138 Shatin Rural Committee Road, N.T, Hong Kong
 Tel: +852 2792 8955 Fax: +852 2792 8952
 Email: flir@flir.com.hk Web: www.FLIR.com/THG

