

3650 TEMPERATURE LOGGER

Environmental Measurement Instruments



Ultra-Compact, Button-Sized Temperature Recorder

*Stores up to 2,048 temperature measurements
(Approx. one year at 255-minute intervals)*

Built-in sensor, memory and power source

Wide measurement range (-40 to 85°C)



17.35mm

PC Compatible

3920-01 DATA READER



3921
DATA CHECKER



Detect Abnormalities

Easily check whether temperatures exceeding set limits have been recorded. This is extremely valuable to operations involving shipping and receiving of perishable commodities.

Easily installs anywhere with
special antibacterial holder




ISO14001
JQA-E-90091



<http://www.hioki.co.jp/>


HIOKI company overview, new products, environmental considerations and other information are available on our website.



Ultra-Compact Logger Enhances Temperature Management Systems

■ Temperature data can be easily analyzed and managed with PC bundled analysis software (for Windows 95/98, DOS/V compatibles)

Recorded data can be loaded into the PC using the 3920-01 DATA READER, where up to 16 data channels can be displayed graphically, managed and stored.

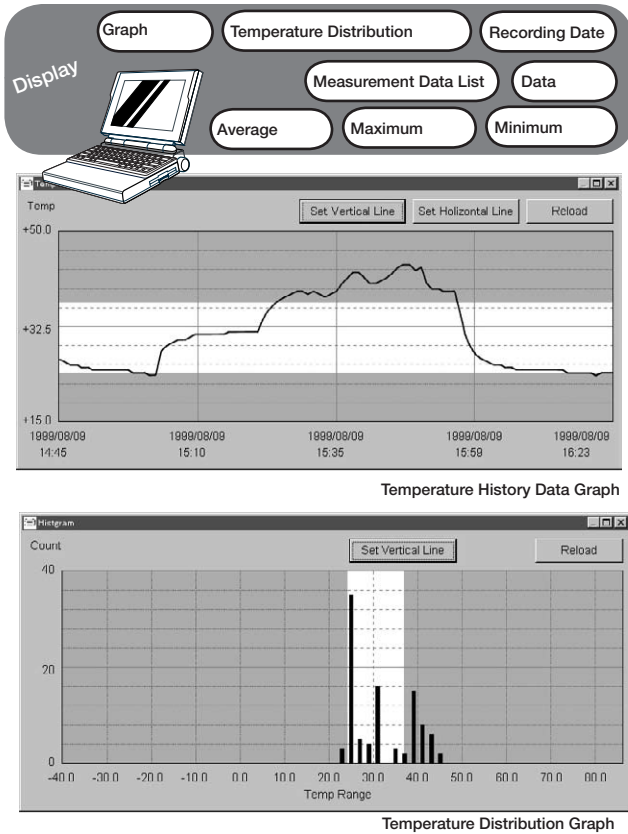

■ Up to One Year's Temperature Data Recorded


Up to 2,048 measurements can be recorded, with measurement intervals selectable from one to 255 minutes, and the longest recording of about one year's worth of temperature measurements.

Measurement Interval	Measurement Time
1 min.	1.4 days
3 min.	4 days
5 min.	7 days
10 min.	14 days
30 min.	42 days
60 min.	85 days
:	:
255 min.	Approx. 1 year

(Battery life is about four years when operating continuously with five-minute measurement intervals below 50°C. The battery is not replaceable.)

■ Easily and Reliably Record Temperature

- Upper and lower temperature limits can be set to emit an alarm, so unusual thermal events can be confirmed.
- The main unit provides a memo function for writing information such as measurement location.

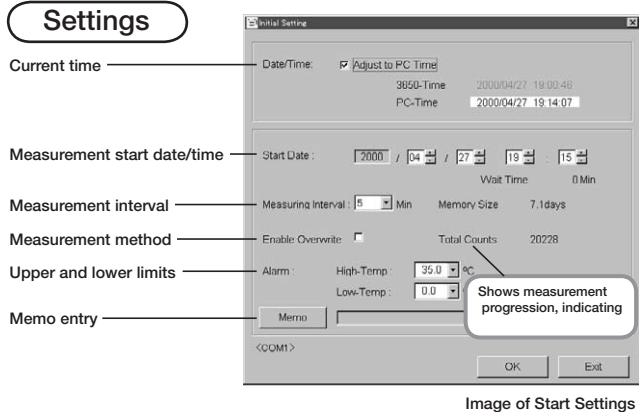

■ 3650 TEMPERATURE LOGGER Specifications

- Measurement range** : -40 to 85°C at 0.5°C resolution (1 ch.)
Accuracy : ±2°C from -40 to -10.5°C,
 ±1.5°C from -10 to 30°C,
 ±2°C from 30.5 to 85°C
- Transfer time** : Max. 10 min. (time to show up to 90% of changed value, from reference value)
Recording capacity : 2,048 data samples (about 1 year at 255 min. recording intervals)
Recording start : Programmable time
Recording end : Endless, or until memory full
Recording interval : 1 to 255 minutes
Recording methods : One-time, stop at memory full;
 Endless (oldest data overwritten when memory full)
- Interface** : RS-232C (using 3920-01 DATA READER)
Power source : Internal battery (non-replaceable), provides 500,000 measurements or more
- Battery life** : Approx. 4 years (at 50°C or less, with continuous use at 5-min. intervals)
Dimensions and mass : Approx. 17.35 dia. × 5.89 thick (mm), 3.3 g
Operating/storage temperature : -40 to 85°C
Waterproofing : IP67
 Measurement cannot be taken under water. Do not submerge.
- Accessories** : Special mount, magnetic sticker, mounting screws
Option : 3920-01 DATA READER, 3921 DATA CHECKER
Conforming standards : EMC EN61326-1 : 1997+A1 : 1998

■ 3920-01 DATA READER Specifications

- Dimensions and mass** : Approx. 108.5W × 25H × 6.5D mm, approx. 84 g
Operating temperature & humidity : 0 to 40°C at 85% rh or less (no condensation)
Storage temperature & humidity : 0 to 40°C at 85% rh or less (no condensation)
Accessories : Communications adapter, cable and PC software (CD-R)
Conforming standards : EMC EN61326-1 : 1997+A1 : 1998
- **PC Software Specifications**
- Operating system** : Windows 95/98
Printing : Graphics printing (max. 16 ch)
File format : Proprietary format (binary),
 Text conversion format (CSV)

Windows95/98 are registered trademark of Microsoft Corporation

3650 TEMPERATURE LOGGER

- Option
- 3920-01 DATA READER
- 3921 DATA CHECKER

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI
 HIOKI E. E. CORPORATION

Headquarters :
 81 Koizumi, Ueda, Nagano, 386-1192, Japan
 TEL +81-268-28-0562 / FAX +81-268-28-0568
 http://www.hioki.co.jp / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION :
 6 Corporate Drive, Cranbury, NJ 08512 USA
 TEL +1-609-409-9109 / FAX +1-609-409-9108
 http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) Sales & Trading Co., Ltd. :
 1608-1610, Shanghai Times Square Office, 93 Huai Hai Zhong Road
 Shanghai, P.R.China POSTCODE: 200021
 TEL +86-21-63910090/63910092 FAX +86-21-63910360
 http://www.hioki.cn / E-mail: info@hioki.com.cn
Beijing Office : TEL +86-10-84418761 / 84418762
Guangzhou Office : TEL +86-20-38392673 / 38392676
HIOKI INDIA PRIVATE LIMITED :
 Khandela House, 24 Gulmohar Colony Indore 452 018 (M.P.), India
 TEL +91-731-4223901, 4223902 FAX +91-731-4223903
 http://www.hioki.in / E-mail: info@hioki.in
HIOKI SINGAPORE PTE. LTD. :
 33 Ubi Avenue 3, #03-02 Vertex, Singapore 408868
 TEL +65-6634-7677 FAX +65-6634-7477
 E-mail: info@hioki.com.sg

DISTRIBUTED BY